


Ordering Guide:
 C12784A: LUMINAIRE
 CA12784B: WALL BRACKET

Ecoswap Module Specifications:

- 42, 4000K (neutral) Philips Lumileds Luxeon R LEDs, typical 75 Color Rendering Index (CRI), >56,000 hours of operational life (at 25°C ambient temperature & 70% lumen maintenance), injection molded Type III optical plates.
- Integral Philips Advance Xitanium LED driver, 500mA, Intellivolt 120-277 VAC, 50-60 Hz, 10kV surge suppression.

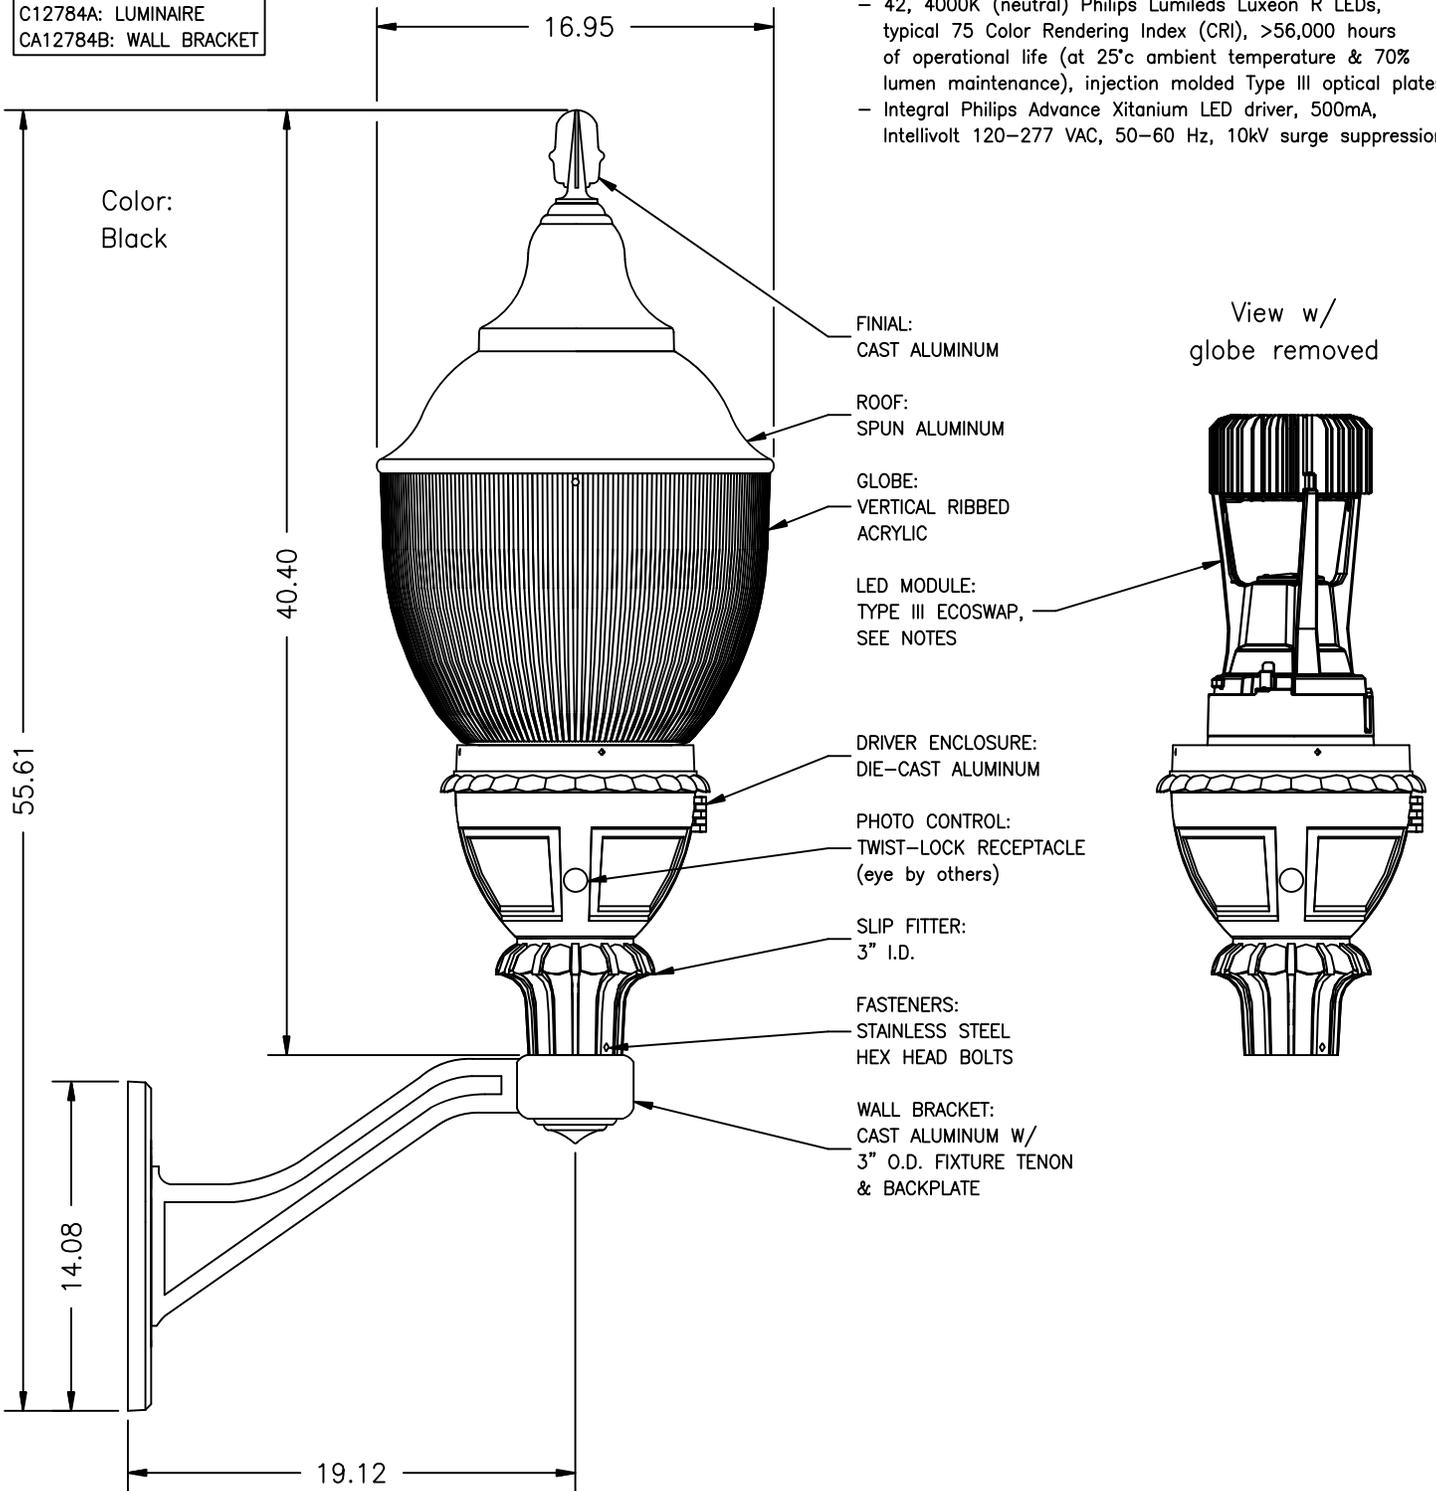

Full Specification Fixture Drawing

NOTICE:
 THIS DRAWING IS FOR REFERENCE ONLY. CHECK FOR LATEST REVISION PRIOR TO ORDERING



100 Craftway Drive
 Littlestown, Pa 17340
 Phone 800-331-4185
 Fax 717-359-9289
 www.hadco.com

JOB NAME: City of Allentown - Arena		REP. TERRITORY: 67	
SCALE: 1:8	DATE: 05/05/14	DRAWN BY: SMK	DRAWING NUMBER: C12784-DWG03
REP: Penn Lighting		REV: A	PCN: 14-022
		BY: .	DATE: .

CONFIDENTIAL:
 This drawing is confidential and proprietary to Philips Hadco and may not be reproduced without the express written consent of Philips Hadco. Any use hereof or of any of the information or detail herein shall be for the sole benefit of Philips Hadco.

PRODUCT APPROVALS	
HADCO	SDK
CUST.	